

STAXX
STAXX MATERIAL HANDLING EQUIPMENT CO., LTD.



24 hours
BUILT TO WORK
www.staxxmhe.com




Pay A Little More Save Much More


BUILT TO
WORK
24
HOURS

SMART SIZE

ALMOST SAME

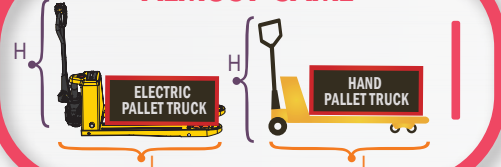

LIGHT WEIGHT




EFFICIENCY

3 Times Higher Than Manual Pallet Truck




EASY MAINTENANCE

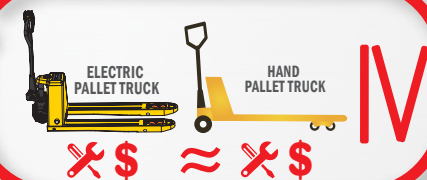

LIFETIME

3 Times Longer Than Manual Pallet Truck

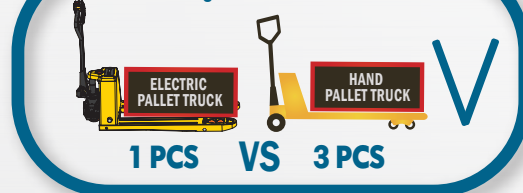

HIGH RETURN OF INVESTMENT

PRODUCTIVE
1 MONTH COST
RECOVERY

Safety

GO

Optimize
your operations

SAVE LABOUR

Brake any time anywhere

Release manpower

● MAINTENANCE SO EASY !!

**5 YEAR
WARRANTY
CHASSIS**



**Brushless drive motor,
maintenance free**



**Lithium battery
maintenance free**



Recharge Alert



Error code display



6s Replace Battery




60s Replace Drive Wheel

● PERFORMANCE



Traveling speed

— **UNLADEN** **5Km/h**
(3.1mph)
+ **LADEN** **4Km/h**
(2.5mph)



Gradeability



● CHARACTERISTICS

Closer look into

Notes: "★" -- Options with additional cost



SMART FUNCTION


STAXX
STAXX MATERIAL HANDLING EQUIPMENT CO., LTD

SMART FUNCTION

01

Turtle Speed

Horn Remains Pressed & Forward 2 times



SMART FUNCTION

02

Up-Right Drive

Reverse Button & Forward Throttle Remain Pressed, Power On




SMART FUNCTION

03



Engineering Mode (Brake Release)

Horn Remains Pressed, Power On




⚠ In up-right drive mode, vehicle will move when handle is operated at any position. Please avoid misoperation.

⚠ Brake release mode is only for emergencies, not allowed for vehicle with normal conditions.

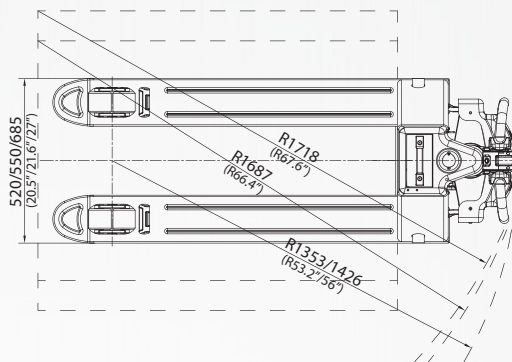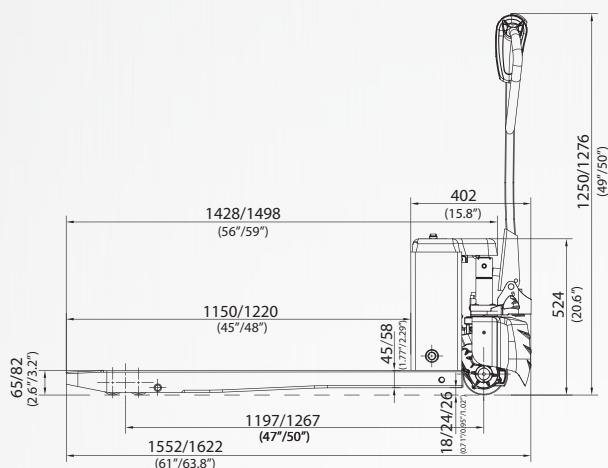

MODEL		PPT20H		EPT15H		EPT20H		EPT15H-65L		PPT44H		EPT33H		EPT44H		EPT33H-2.6L	
CHARACTERISTICS																	
1.1	Capacity	kg	2000	1500	2000	1500	lb	4400	3300	4400	3300						
1.2	Load center	mm	600	600	600	600	in	23.6	23.6	23.6	23.6						
1.3	Overall fork width	mm	550/685	520/550/685	550/685	550/685	in	21.6/27	20.5/21.6/27	21.6/27	21.6/27						
1.4	Fork length	mm	1150/1220	1150/1220	1150/1220	1150/1220	in	45/48	45/48	45/48	45/48						
1.5	Overall length	mm	1552/1622	1552/1622	1552/1622	1552/1622	in	61/63.8	61/63.8	61/63.8	61/63.8						
1.6	Lowered height of fork	mm	82±2	82±2	82±2	65±2	in	3.2±0.8	3.2±0.8	3.2±0.8	2.6±0.8						
1.7	Max height of fork	mm	197	197	197	165	in	7.8	7.8	7.8	6.5						
1.8	Overall height (with tiller)	mm	1276	1276	1276	1250	in	50	50	50	49						
1.9	Rear body width	mm	550/685	520/550/685	550/685	550/685	in	21.6/27	20.5/21.6/27	21.6/27	21.6/27						
1.10	Minimum turning radius	mm	1353/1426	1353/1426	1353/1426	1353/1426	in	53.2/56	53.2/56	53.2/56	53.2/56						
PERFORMANCE																	
2.1	Max.Traveling speed	laden	km/h	4	4	4	4	mph	2.5	2.5	2.5	2.5					
		unladen	km/h	5	5	5	5	mph	3.1	3.1	3.1	3.1					
2.2	Gradeability	laden	%	6	6	6	6	%	6	6	6	6					
		unladen	%	20	20	20	20	%	20	20	20	20					
2.3	Traveling	kw	DC 1.0 Brushless	DC 0.75 Brushless	DC 1.0 Brushless	DC 0.75 Brushless	kw	DC 1.0 Brushless	DC 0.75 Brushless	DC 1.0 Brushless	DC 0.75 Brushless						
2.4	Lifting	kw	Hydraulic	DC 0.8	DC 0.8	DC 0.8	kw	Hydraulic	DC 0.8	DC 0.8	DC 0.8						
BATTERY																	
4.1	Voltage	V	48	48	48	48	V	48	48	48	48						
4.2	Capacity/type	Ah	10/15 Ah Lithium	10/15 Ah Lithium	10/15 Ah Lithium	10/15 Ah Lithium	Ah	10/15 Ah Lithium	10/15 Ah Lithium	10/15 Ah Lithium	10/15 Ah Lithium						
BRAKE TYPE																	
5.1	Travel brake		Regenerate	Regenerate	Regenerate	Regenerate		Regenerate	Regenerate	Regenerate	Regenerate						
5.2	Brake		Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic		Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic						
CONTROLLER																	
6.1	Controller		STAXXB1503	STAXXB1503	STAXXB1503	STAXXB1503		STAXXB1503	STAXXB1503	STAXXB1503	STAXXB1503						

MAKE
YOUR JOB
EASIER!

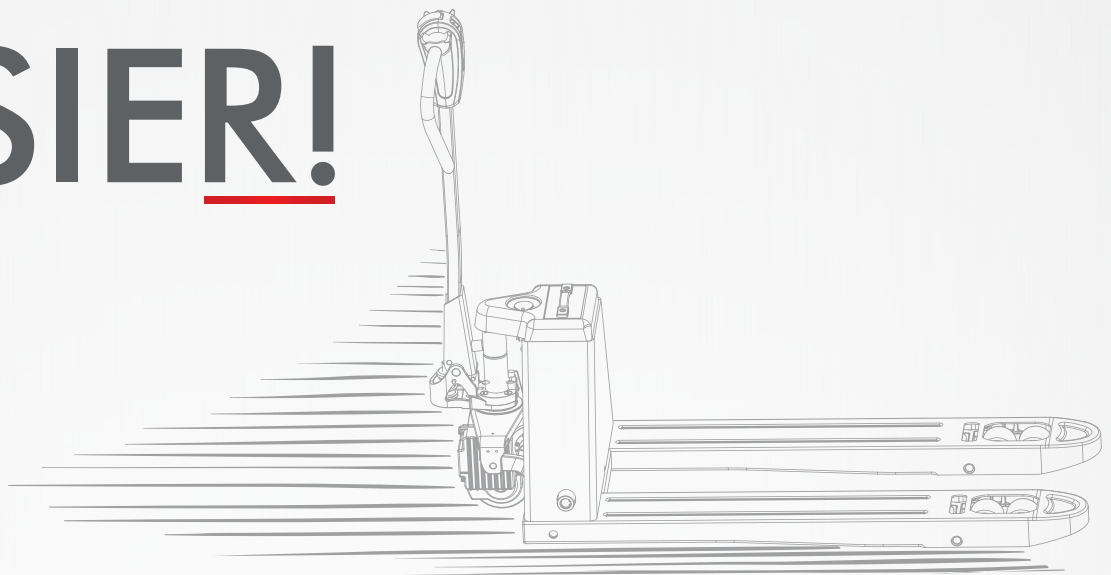

STAXX

STAXX MATERIAL HANDLING EQUIPMENT CO., LTD

NINGBO STAXX MATERIAL HANDLING EQUIPMENT CO., LTD

Email: info@cnmhe.com **Tel :** +86-574-8921-7230

Web: www.staxxmhe.com **Fax:** +86-574-8921-7240

Add: FIRST FLOOR, NO.10 BUILDING, NO.688 JINDA ROAD,
YINZHOU DISTRICT, NINGBO